

VIDEO CONTROL CENTER FOR RV's

5 Input / 3 Output with Electronic Switching

FRONT



Model # QS53E




REAR

Features

- **Electronic Sequencial Switching**
- 5 Video sources to any 3 connected TV's Input: 4 coaxial F and 1 composite RCA Ouput: 3 coaxial F and 1 composite RCA
- Channel 3 or 4 switchable modulator
- Built-in IR Remote capability*
- 30dB minimum port-to-port isolation
- Built-in over-voltage protection
- Advanced Internal component shielding for EMI/RFI noise isolation
- 12VDC operation with 12VDC output on "TV Ant In" for amplified off-air antenna
- LED indicators for all functions
- Slide-out adjustable mounting bracket
- 12 months manufacturers warranty

*Optional **IR Accessories**

Video Switch Remote



IR TX Cable



IR RX Cable












VIDEO CONTROL CENTER FOR RV's

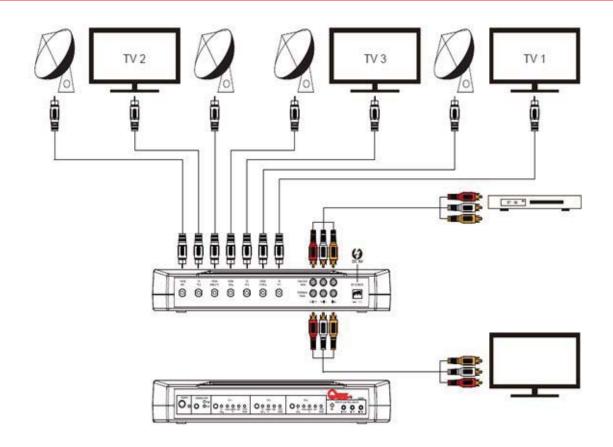

SPECIFICATIONS

Input Port 4 Coaxial "F" and 1 composite RCA
Output Port 3 Coaxial "F" and 1 composite RCA

Output Resolutions 480P

Output channel (from modulator) CS=1:3ch&CS=0:4ch

(NTSC 61.25MHz &67.25MHz)

RF Frequency 5 - 1,000 Mhz
RF I/O impedance F Jack 75 Ohm
Power Supply DC 12 Volts

Current consumption 21 mA typical/30 mA max. 12V ±0.2V 300mA Supply Voltage MOD: 21 mA typical/30 mA max. 12V ±0.2V 300mA Operation 12V DC output on (TV ANT.IN) port

Operating temperature range
Operating humidity
Storage temperature range
Storage humidity
-35°C to 70°C
less than 85%
-40°C to 80°C
less than 90%

Chassis Dimension (LxWxH) 13" x 4-3/4" x 2 3/16" (330mm x 120mm x 55mm)

Weight (Shipping Weight) 1.1lb. (1.5lbs.)

Warranty 1 year







