更改 REV	出图日期 DATE	设变内容 MODIFICATION	修改 DRAWN
	2013/09/05		

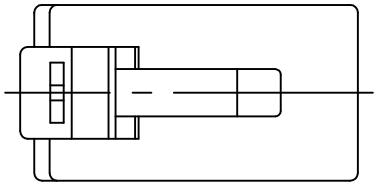



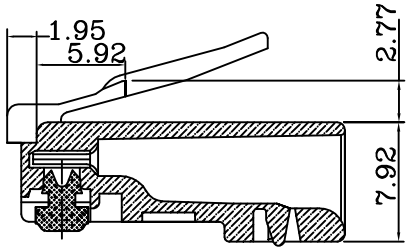

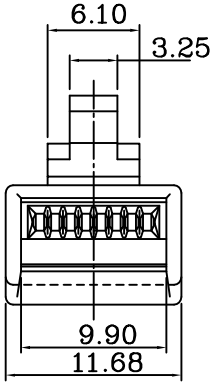

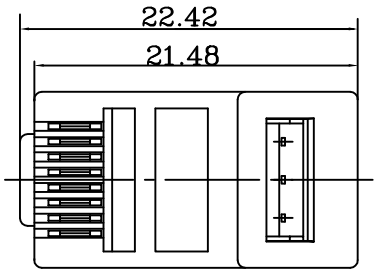

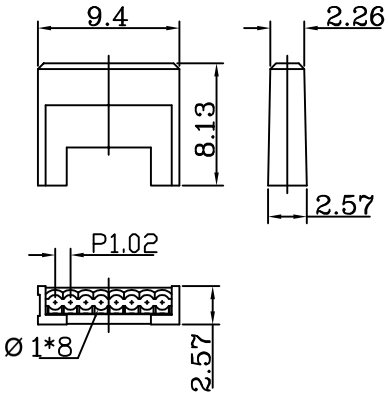

SPECIFICATIONS
1.ELECTRICAL:
UL APPLICATIONS: 250 VOLTS AC MAX., AT 2 AMPS.
DIELECTRIC WITHSTANDING VOLTAGE : 1000 VOLTS AC.
INSULATION RESISTANCE: 100 M Ω .
TERMINATION: RESISTANCE 20m Ω MAX AFTER ENVIRONMENTAL TESTING.
2.MECHANICAL:
CABLE-TO-PLUG TENSILE STRENGTH : 19.6N/PCS MIN.
DURABILITY : 200 MATING CYCLES.
3.MATERIAL & FINISH:
HOUSING: POLYCARBONATE, UL94V-0 OR UL94V-2.
COLOR : TRANSPARENT OR OTHER COLOR ARE AVAILABLE.
CONTACT BLADE: COPPER ALLOY .
CONDUCTOR : SOLID WIRE , 24AWG, 26 AWG.
GOLD PLATING: 50u".

BLADE:	B
Drawing	
Mark	

Quest Technology Iinternational,Inc.
11200 NW 138th St.Medley,FL 33178

DIMENSION IN mm (Inch) TOLERANCE UNLESS OTHERWISE SPECIFIED		材质 MATERIAL	图号 DWG NO.
		PC	NMP-8625
.X±0.20	.X°±5°	名称 TITLE	Cat.5E MODULAR PLUG 8P8C FOR ROUND CABLE, STRANDED WIRE,WITH INSERT
.XX±0.10	.XX°±2°		
审核 APPROVAL	核对 CHECKED	制图 DRAWN	比例 SCALE 2/1 / 张数 SHEET 1/1
		CathyLi	角法 PROJ. / 更改 REV A

ST-DR-009A