


MARKING:

QUEST CABLING SOLUTIONS CAT6A 550MHZ UTP 60°C ISO/IEC 11801 & EN50288 & ANSI/TIA-568C.2 ETL/SP VERIFIED -24AWG/4P PATCH TYPE CM (UL) E466009 MCT ROHS

NOTE: All relevant materials are compiled with RoHS directive .

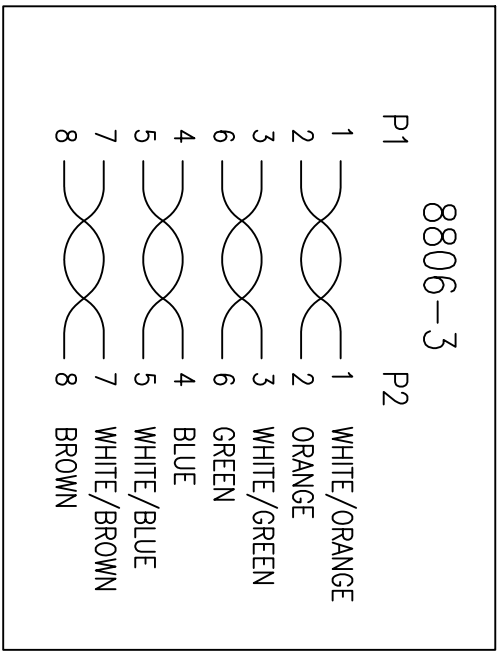

1 OF 2

REV.5 2021.02.23	MODIFY BAG	REV.4 2019.03.15	MODIFY CABLE MARKING
REV.3 2018.12.11	MODIFY LABEL & BAG	REV.2 2014.03.21	MODIFY CABLE&LABEL
REV.1 2013.08.20	ADD UL/ROHS LOGO		

3	MOLDED PVC SEE LIST	H1BP01-0304	M304
2	4 TWISTED PAIRS CAT.6A 24AWG STRAND UTP WITH CROSS, 0D6.9mm, JACKET SEE LIST, DRAWING NO: EU002404P-545	H5AJ73-0304	M304
1	8P8C MODULAR PLUG (P8-040-1), GOLD PLATING 50U" ON CONTACTS, TRIPLE X	A1ND19-0205	M205
No.	DESCRIPTION		
APPROVED			
CHECKED	HU		
DESIGNER	JHANG		
DRAWING	ZHU		
DATE	23/FEB/21	ITEM NO.	NPC-3XXX



QUEST Technology Intl, Inc.
11200 NW 138th St, Medley, FL 33178

Cable Length	0 ~200mm	±10mm
Tolerances:	201~1000mm	±20mm
	1001 ~1500mm	±25mm
	1501~2100mm	±30mm
	2100mm↓	±40mm

ITEM NO.	LENGTH(FT)
NPC-3X01	1
NPC-3X03	2
NPC-3X05	3
NPC-3X07	5
NPC-3X10	7
NPC-3X14	10
NPC-3X15	15
NPC-3X25	25
NPC-3X50	50
NPC-3X75	75
NPC-3X00	100


NPC-3XXX
 ↳ LENGTH
 ↳ COLOR CODE

JACKET COLOR & PVC COLOR	COLOR CODE
BLACK	1
BLUE	2
RED	3
ORANGE	4
YELLOW	5
GREEN	6
WHITE	8
GREY	9

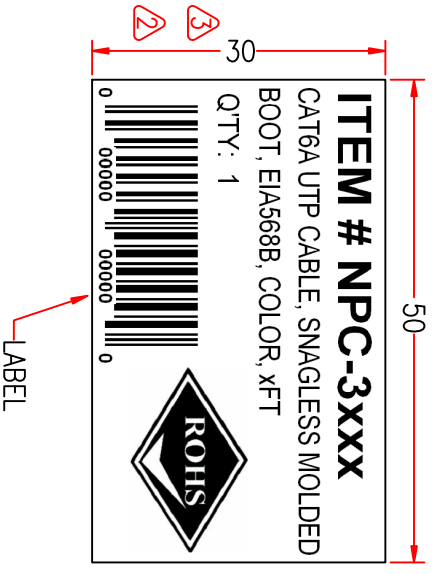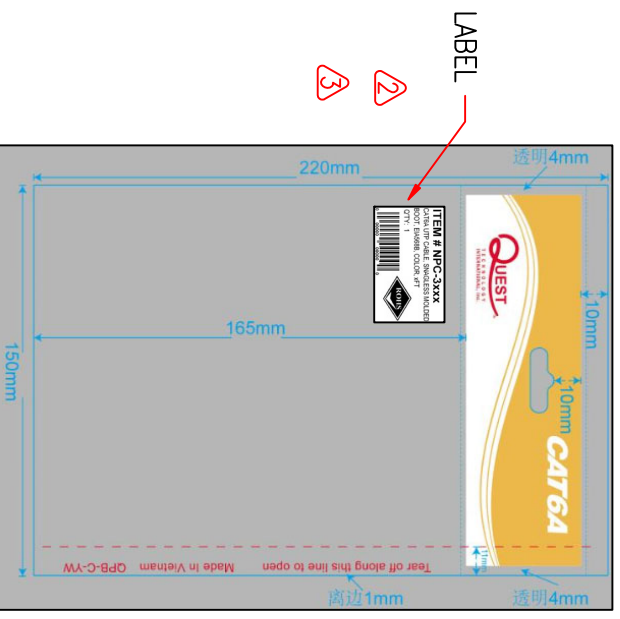

Quest Bag#	(WxL) MM	Approximate (WxL) Inches	Application
C	150x220	6.00" w x 8.50" l	Cables - 1ft, 2ft, 3ft, 5ft, 7ft
E	230x300	9.06" w x 11.81" l	Cables - 10ft, 15ft, 25ft
G	320x370	12.60" w x 14.57" l	Cables - 50ft, 75ft, 100ft

*NOTE: All relevant materials are compiled with RoHS directive.



2 OF 2

REV.5 2021.02.23	MODIFY BAG	REV.4 2019.03.15	MODIFY CABLE MARKING
REV.3 2018.12.11	MODIFY LABEL & BAG	REV.2 2014.03.21	MODIFY CABLE&LABEL
REV.1 2013.08.20	ADD UL/RoHS LOGO		

APPROVED	CHECKED	DESIGNER	DRAWING	DATE	ITEM NO.	UNIT:mm
	HU	JIANG	ZHU	15/MAR/19	NPC-3XXX	
				Quest Technology Intl, Inc. 11200 NW 138th St, Medley, FL 33178		
Cable Length Unless Other Spec: Tolerances: 0 ~200mm ±10mm 201~1000mm ±20mm 1001 ~1500mm ±25mm 1501~2100mm ±30mm 2100mm± 40mm						