



C5e PATCH PANEL UTP 50u

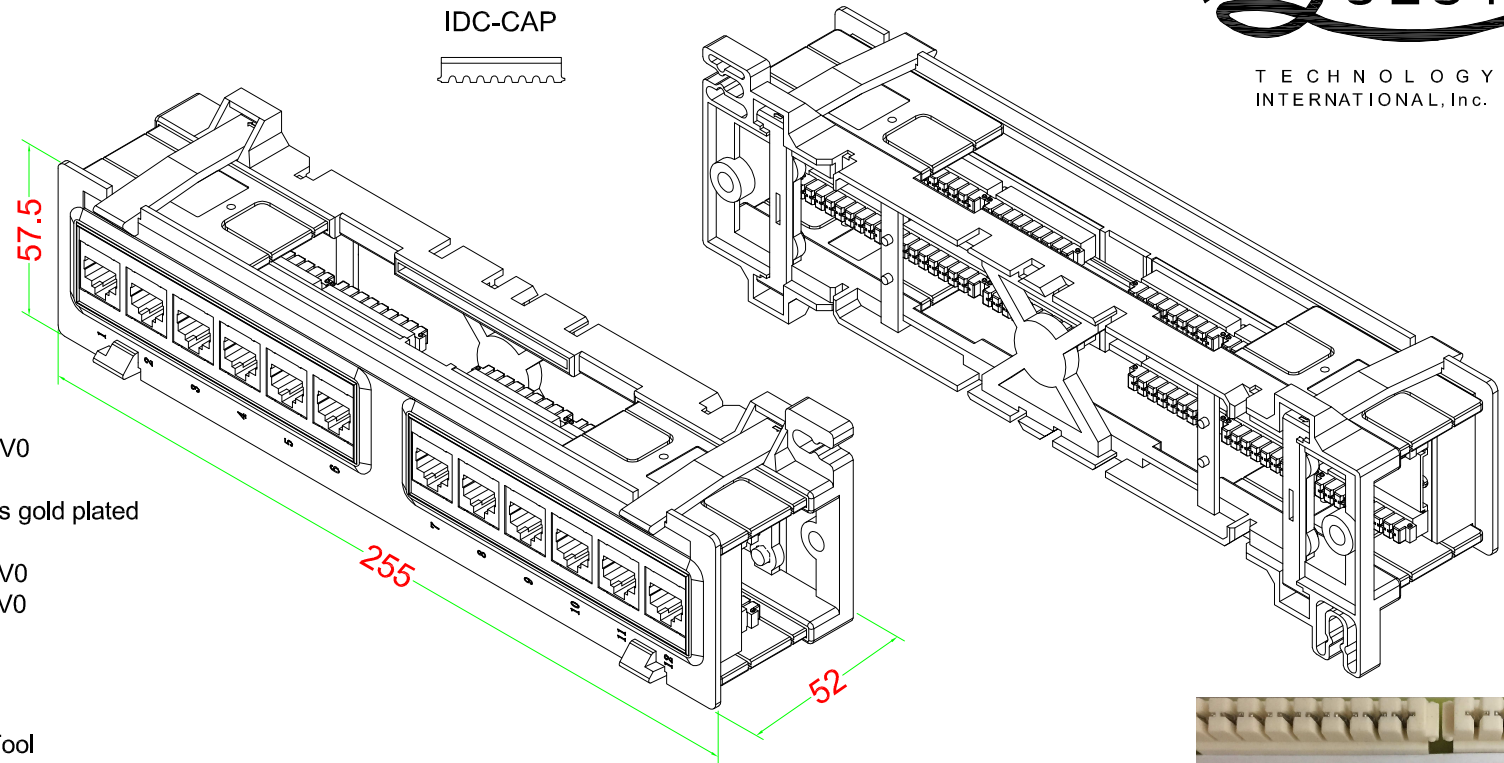

IDC-CAP



Performance:

Meets EIA/TIA 568.2-D Standard.

Materials:

Front Plate : Fireproof ABS UL-94V0
 Bracket : ABS
 Jack : 8P8C 50 micro inches gold plated
 PCB : FR-4 / UL-94V0
 IDC Cap : Fireproof ABS UL-94V0
 IDC Body : Fireproof ABS UL-94V0
 IDC Pin : Bronze & Tinned

IDC Description For 22-26 AWG.

For 110 punch-down Tool


Electrical Specifications:

Insulation Resistance : 500M ohms (min.)
 Contact Resistance : 20m ohms (max.)
 Current Rating : 1.5 Amps .
 DC Resistance : 0.1 ohms (max.)
 Withstanding Voltage : 1000 VAC RMS @ 60Hz / 1 min.

Mechanical Specifications:

IDC Punch Down Cycle : Over 250 Cycles (min.)
 Jack Insertion Cycle : Over 2000 Cycles (min.)

Operation Temperature : -40 °C ~ +70 °C

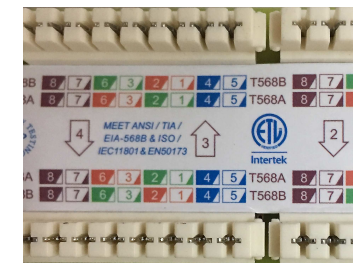

DRAW NO:		ITEM NO:	NPP-5012
	APPR	CUSTOMER:	
UNIT: m/m	DESIGN	DATE:	
SCALE:	Ref. NO:	TOLERANCE:	X ± 1 · X ± 0.2 · XX ± 0.15
		Quest Technology International, Inc. 11200NW 138th Street Medley, FL33178	